



4.1

4.1.1 10A

4.1.2

4.1.3 i t 4



项目	序号	整定电流倍数	动作时间	试验条件
	1	1.05	2	
	2	1.2	2	(1)
	3	1.5	2	
	4	7.2	2s Tp 10s	
	5	1.0 0.9	2	
	6	1.15 0	2	(5)

4.3 ()



产品外观	额定电流 A	相匹配熔断器规格(推荐RT16) A		相匹配接触器型号
		aM	gG	
	0.1-0.16	0.25	2	
	0.16-0.25	0.5	2	
	0.25-0.4	1	2	
	0.4-0.63	1	2	
	0.63-1	2	4	
	1-1.6	2	4	
	1.25-2	4	6	
	1.6-2.5	4	6	
	2.5-4	6	10	
	4-6	8	16	
	5.5-8	12	20	
	7-10	12	20	
	9-13	16	25	
	0.1-0.16	0.25	2	
	0.16-0.25	0.5	2	
	0.25-0.4	1	2	
	0.4-0.63	1	2	
	0.63-1	2	4	
	1-1.6	2	4	
	1.25-2	4	6	
	1.6-2.5	4	6	
	2.5-4	6	10	
	4-6	8	16	
	5.5-8	12	20	
	7-10	12	20	
	9-13	16	25	
	12-18	20	35	
	17-25	25	50	

NR2-11.5





NC6-09

NR2-25


NC1/CJX2-09 NC1/CJX2-12
 NC1/CJX2-18 NC1/CJX2-25
 NC1/CJX2-32
 NC7/NC100-09-18
 NC7/NC100-25-32

产品外观	额定电流 A	相匹配熔断器规格(推荐RT16) A		相匹配 接触器型号
		aM	gG	
 NR2-36	23-32	40	63	NC7/NC100-32-38 NC1/CJX2-32
	28-36	40	80	
 NR2-93	23-32	40	63	NC1/CJX2-40 NC1/CJX2-50 NC1/CJX2-65 NC1/CJX2-80 NC1/CJX2-95 NC7/NC100-40-65 NC7/NC100-80-95
	30-40	40	100	
	37-50	63	100	
	48-65	63	100	
	55-70	80	125	
	63-80	80	125	
	80-93	100	160	
 NR2-150(NC2)	80-104	125	200	NC2-115 NC2-150
	95-120	125	224	
	110-150	160	250	
 NR2-150(NC7)	80-104	125	200	NC7-115 NC7-150 NC7-170
	95-120	125	224	
	110-150	160	250	
 NR2-200	80-125	125	200	NC2-115 NC2-150 NC2-185 NC2-225 NC7-115-170 NC7-205
	100-160	160	250	
	125-200	200	315	
 NR2-630	160-250	250	400	NC2-185 NC2-225 NC2-265 NC2-330 NC2-400 NC2-500 NC2-630 NC7-205-300 NC7-410-475 NC7-620
	200-315	315	500	
	250-400	400	630	
	315-500	500	800	
	400-630	630	800	

4.4

	名称	用途
	MB-1	NR2-11.5
	MB-2	NR2-25
	MB-3	NR2-36
	MB-4	NR2-93

4.5

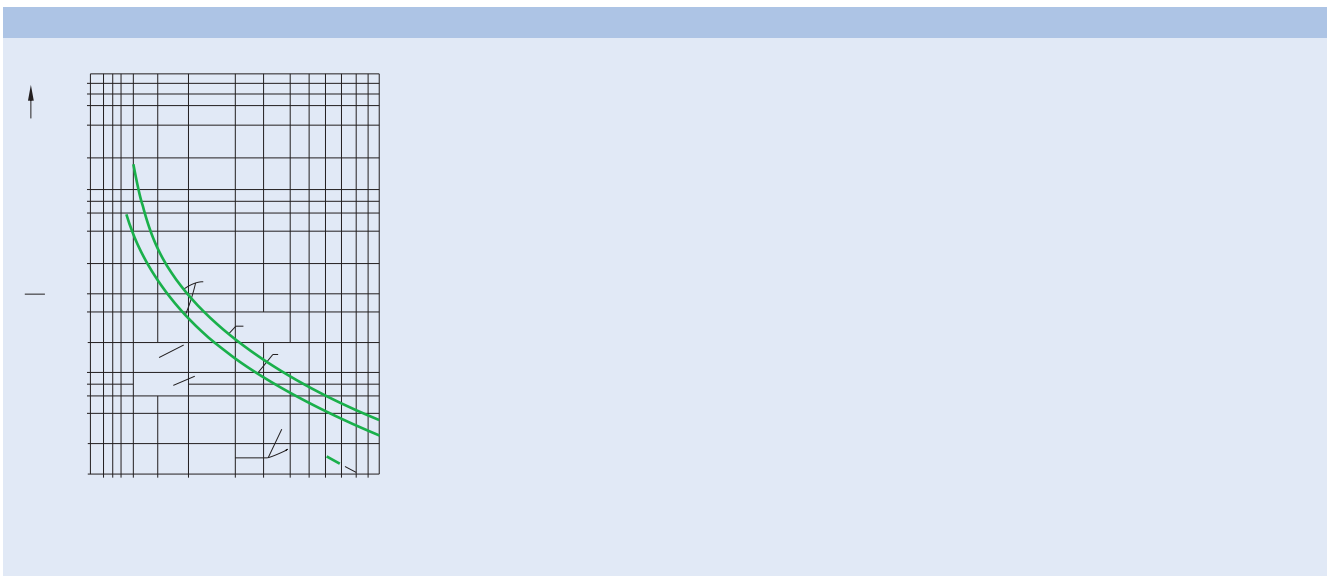

5

NR2-11.5

