


# BSM






ISO EN60423  
 C,E ,B,F A  
 CE,ROHS O IP68  
 -40°C 150°C  
 94V-0 GB/T 2408-2008  
 1.  
 2.


## C | P á

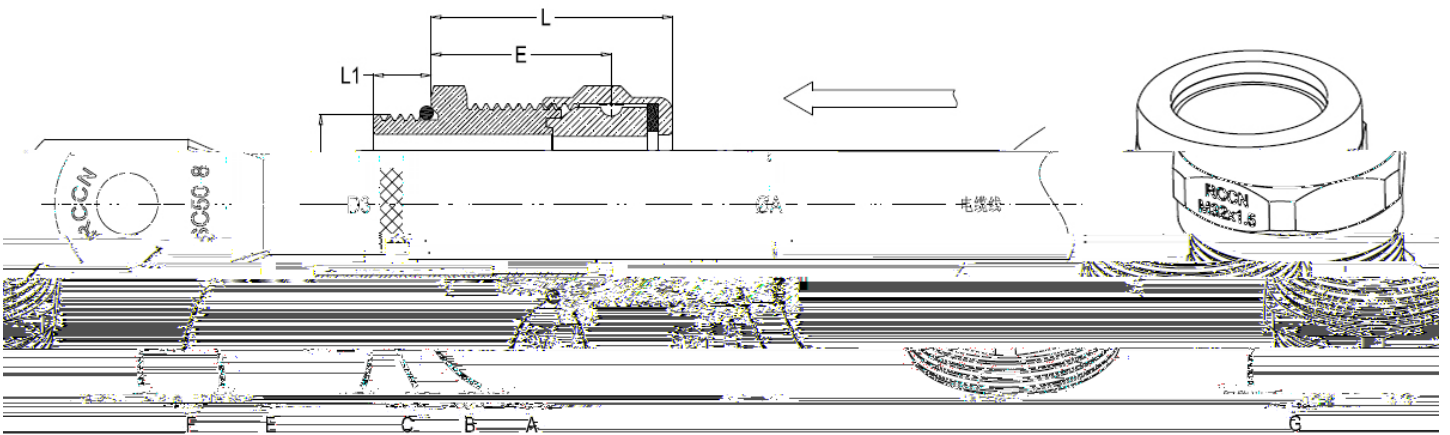



	ΦA mm	D3	L1(mm)			SW(mm)	SW1(mm)			
				L(mm)	E(mm)					
BSM-M25X1.5N(11-16)	11-16	M25X1.5	8	34	24.4	30	30	35mm <sup>2</sup>	17	SC36-6 SC35-8 HUP35-6 HUP35-8
BSM-M25X1.5N(14-19)	14-19	M25X1.5	8	34	24.4	30	30	50mm <sup>2</sup>	19	SC50-8 SC50-10 SG50-8
BSM-M32X1.5N(14-19)	14-19	M32X1.5	8	34	24.4	34	30	50mm <sup>2</sup>	19	SC50-8 SC50-10 SG50-8
BSM-M32X1.5N(17-21)	17-21	M32X1.5	8	35	25	34	34	70mm <sup>2</sup>	23.5	SC70-8 SC70-10 SG70-8 SG70-10

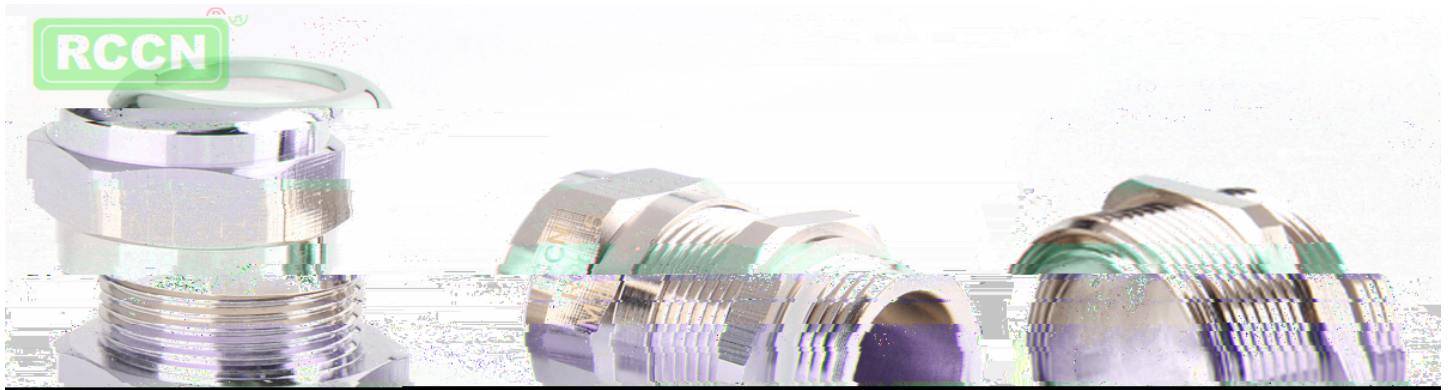


P á / É




BSM



TUV-CE



IP68



CE