




## 型号说明

快速选型与配合表

		RT16 A			
A		gG			
NXR-12	0.1-0.16	2	NXC-06M 09M 12M		
	0.16-0.25	2			
	0.25-0.4	2			
	0.4-0.63	2			
	0.63-1	4			
	1-1.6	4			
	1.25-2	6			
	1.6-2.5	6			
	2.5-4	10			
	4-6	16			
	5.5-8	20			
	7-10	20			
	9-12	25			
	0.1-0.16	2			
0.16-0.25	2				
0.25-0.4	2				
0.4-0.63	2				
0.63-1	4				
1-1.6	4				
1.25-2	6				
1.6-2.5	6				
2.5-4	10				
4-6	16				
5.5-8	20				
7-10	20				
9-13	25				
12-18	35				
17-25	50	NXC-225 265 330 400 500 630			
23-32	63				
30-38	80				
NXR-38					
NXR-100	23-32	63			
	30-40	100			
	37-50	100			
	48-65	100			
	55-70	125			
	63-80	125			
	80-93	160			
	80~100	160			
NXR-200	80-160	315	NXC-120 160 185 225		
	125-200	315			
NXR-630	125-250	800			
	200-400	800			
	315-630	800			

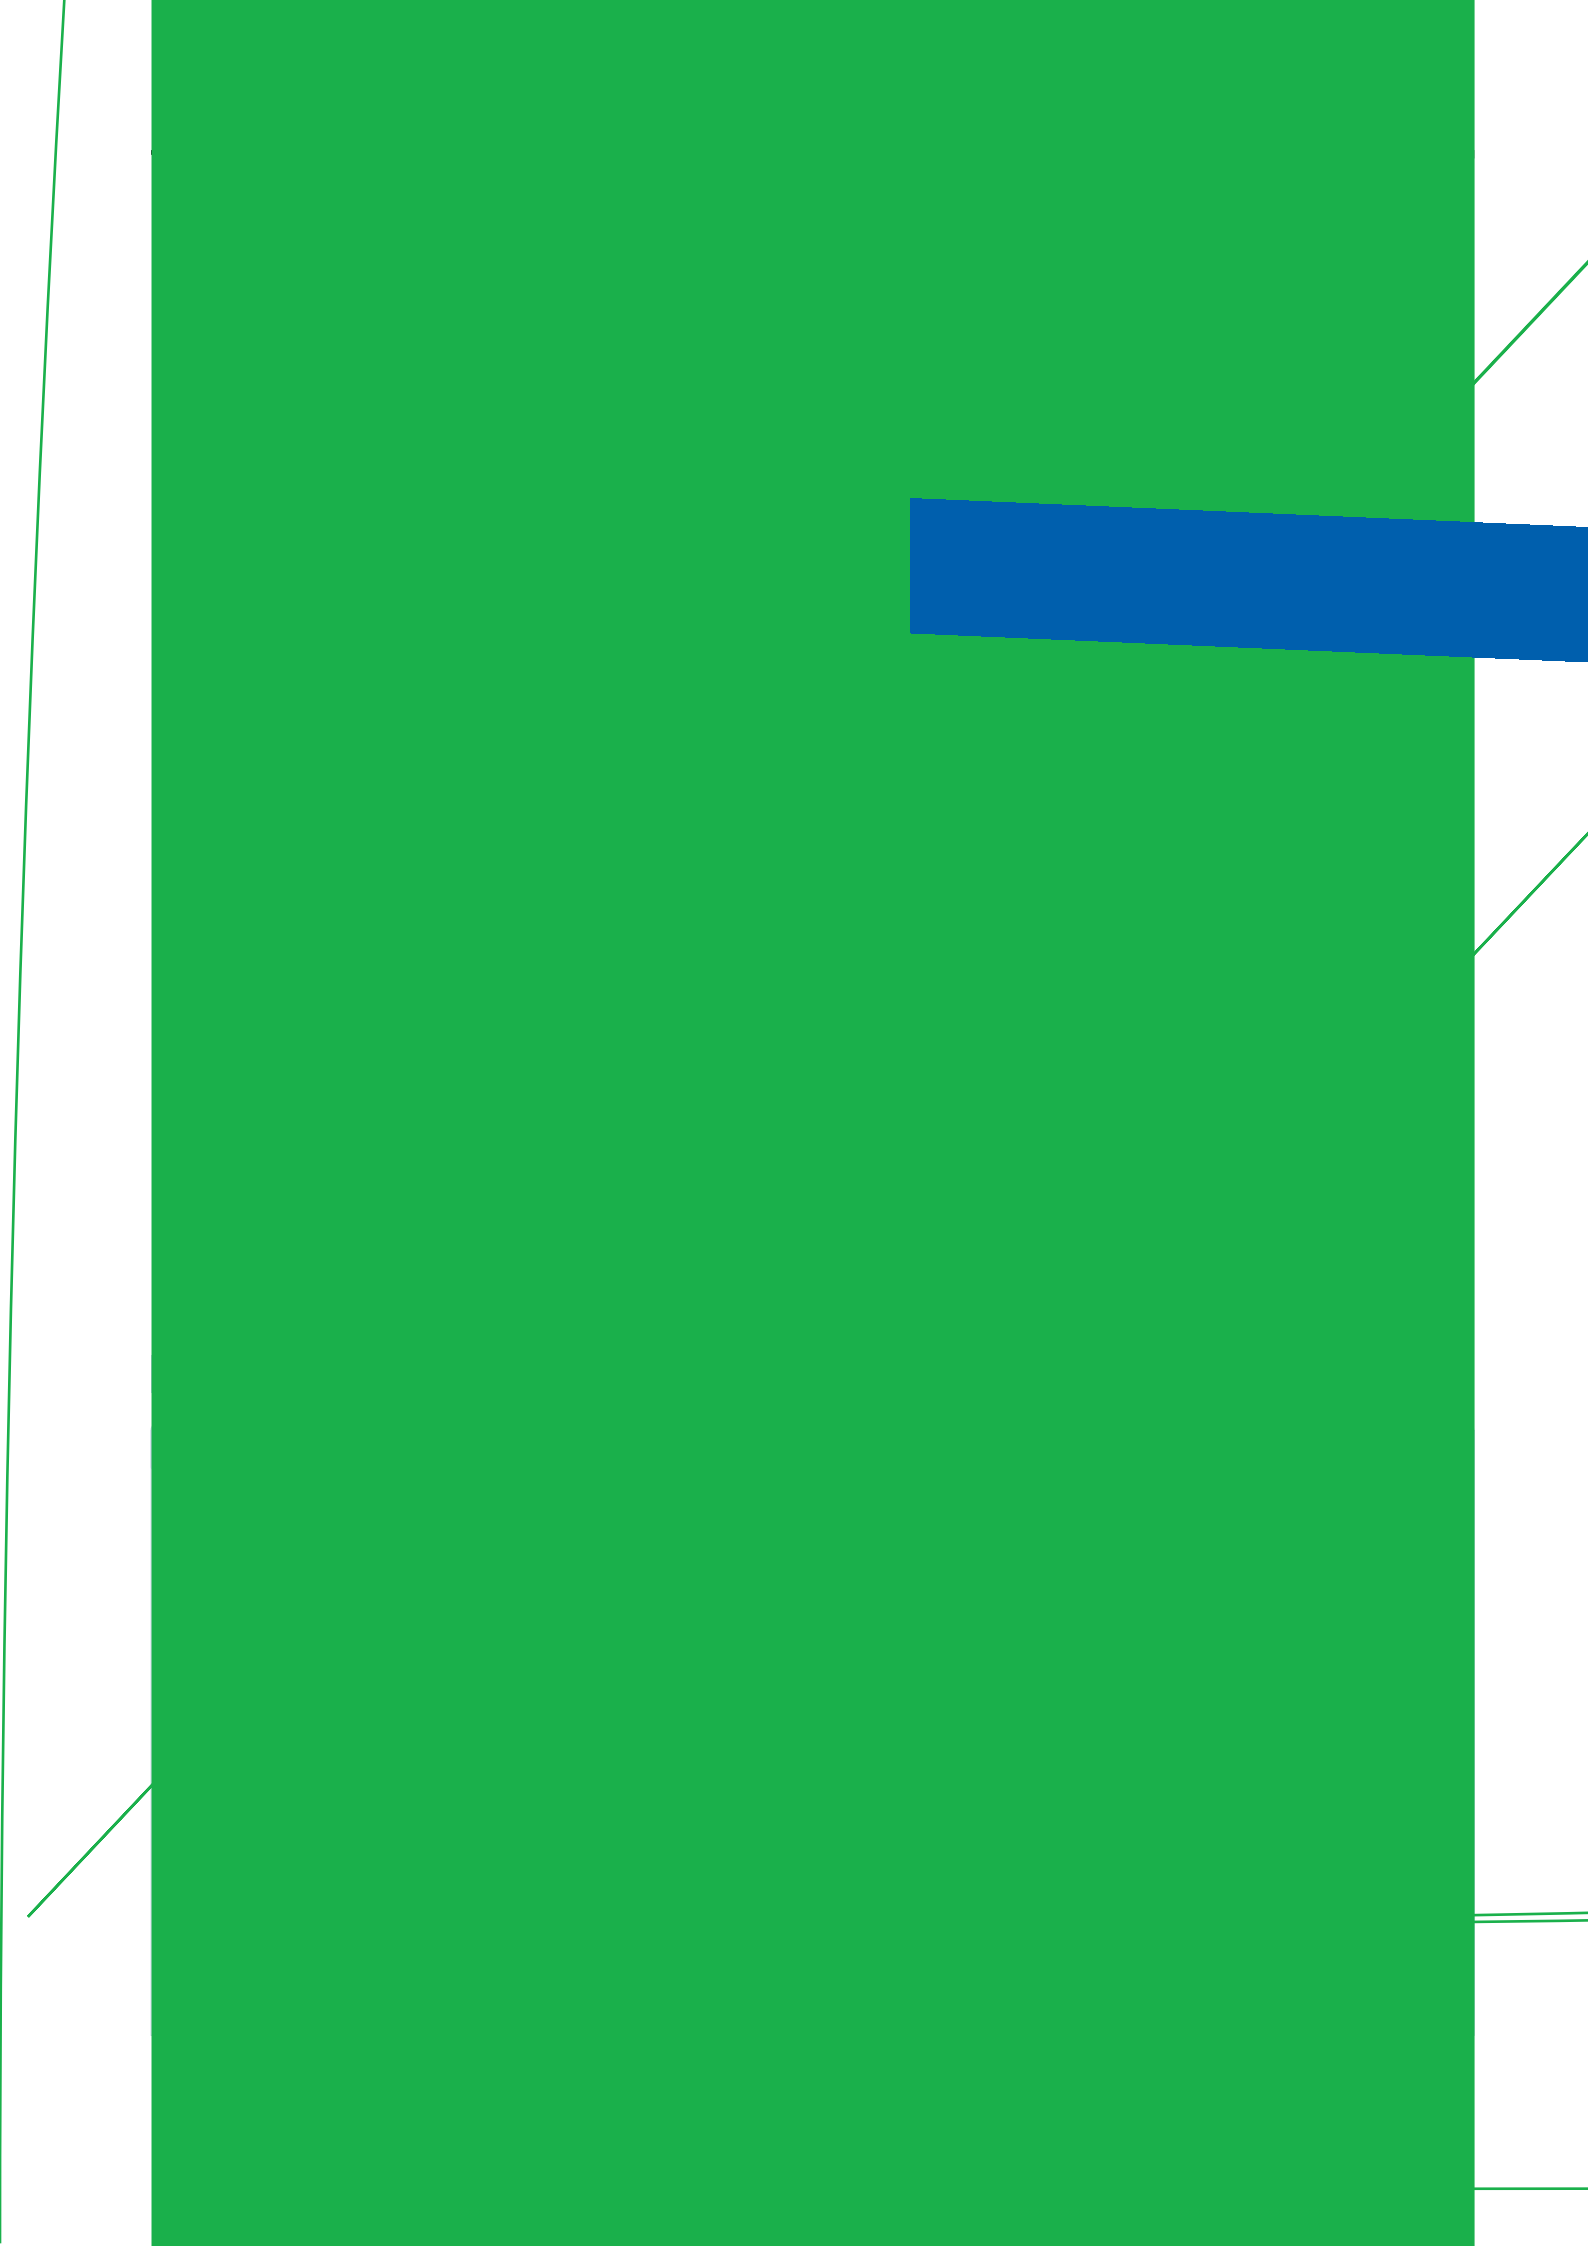


# 产 品 示 意 图



# 外形及安装尺寸

NXR-25



NXR-38

